

EASY One

Safety, simplicity, savings



Opaque cover



Pool surface area
 $\leq 5 \times 10$ m



Weight per m²
1.10 Kg



On-tube tension
system



Finish



Wooden swimming
pools



Abrasion
resistance



Leaf-proof
anti-lifting system



Cut-off corners



Safety
covers
with STANDARD
NF P
90-308
certified
by the LNE
compliant




Demonstration
video
of the ROLLTROT²®



EASY One

The right price.

Made from reinforced flexible PVC, easy to install, with protective runners under the tubes and an efficient tension system. 7 colours available for perfect integration. Ideal for guaranteeing the safety of your swimming pool all year round.



1




2




3



4

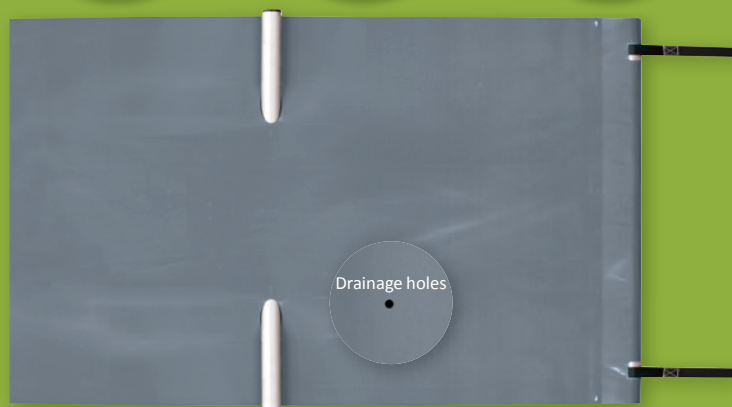

Drainage holes

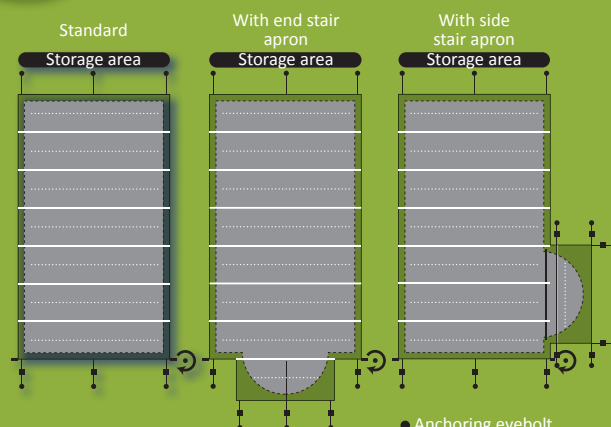

● Anchoring eyebolt
■ Pawl

1 Easy to use

The cover is rolled up using a hand-wheel or effortlessly using the ROLLTROT[®] motor. Average operating time: unrolling = 2 mins/rolling = 3 mins.

2 Fast

3 to 5 stainless steel tension pawls.

3 Less wear and tear

thanks to the protective composite runners riveted under the tubes.

4 On-tube tension system

which gives a perfectly taut cover.

Quick and easy installation

Fits easily

onto most existing or new pools.

Economical solution

Less evaporation.
Improved heat balance for longer, more affordable pool use.
Cleaner water.
An improvement on the solar cover, with its roller and the winterisation cover.

No stress

Once unrolled and locked, safety is guaranteed.

Warning

This cover is not a substitute for common sense or personal liability. It does not aim to replace the vigilance of parents and/or responsible adults, which remains the essential factor in the protection of young children.

Guarantee
3
Years*

*Full guarantee: See general conditions of sale.

DELIVERED WITH

- Stainless steel pawls.
- Eye bolts.
- Reinforced down-gear hand-wheel.

COLOURS

Blue/Ivoire
Green/Ivoire
Amande/Ivoire
Ivoire/Ivoire

Terracotta/Ivoire
Grey/Grey
Dark Grey/Grey

IDENTITY CARD	
Fabric	Soft PVC reinforced with a polyester weft.
Weight	Fabric = 580 g/m ² . Cover = 1.1 Kg/m ² .
Breaking strength	2,500 N/5 cm (warp) and 1,800 N/5 cm (weft).
Tear strength	250 N (warp and weft direction).
Treatment	UV, cryptogamic and bacterial.
Tube	1.5 µ, ø 45 and 50 mm anodised aluminium.
Overlaps	25 cm around the edge of the pool.

OPTIONS

- Eye bolt/sheath.
- Wooden deck stud.
- Quick-release tensioning strap.

NEW Removable unrolling strap
(Once the bar cover has been deployed, the strap can be stored).

ROLLTROT[®] DUO

Demonstration video



Recommended retailer